



**Installation Methods:** Parquet, Herringbone, Basketweave, Brick, Monolithic, Ashlar

Product Specifications

<b>Construction</b>	Patterned Loop
<b>Backing</b>	Nexus® Modular
<b>Dye Method</b>	Solution Dyed
<b>Fiber Type</b>	Encore® SD Ultima® (with recycled content)
<b>Face Weight</b>	22 oz./sy (746 grams/m2)
<b>Pile Density</b>	8509 oz./y3 (315.52 kg/m3)
<b>Pattern Repeat</b>	N/A
<b>Gauge</b>	1/12 (4.72 rows/cm)
<b>Stitches Per Inch</b>	10 stitches/in (3.94 stitches/cm)
<b>Standard Size</b>	18" X 36" approx. (45.72cm x 91.44cm)
<b>Standard Adhesive</b>	Commercialon Premium Modular Adhesive
<b>Optional Adhesive</b>	TileTabs, Advance Modular Carpet   Cushion Adhesive, Nexus Cushion Modular Adhesive
<b>Standard Warranties</b>	<b>Nexus Modular Commercialon Adhesive for Modular Carpet &amp; LVT Encore® SD Ultima Fiber</b>
<b>Optional Warranties</b>	<b>Nexus Cushion Modular Nexus FC Cushion Advance Modular Backing Tile Tabs Nexus Cushion Adhesive Advance Modular Adhesive Encore® 100 Fiber</b>


Special Technologies

<b>ProSept® Antimicrobial</b>	Optional
<b>ProTex® Soil Release</b>	Standard
<b>Sentir® Odor-Blocker</b>	Optional

Environmental Specifications & Tests

<b>NSF 140:</b>	Gold Certified
<b>Indoor Air Quality</b>	GLP9716
<b>Total Recycled Content</b>	44.8%
<b>Radiant Panel</b>	Class 1
<b>Smoke Density</b>	Less than 450 flaming (ASTM E 662)
<b>Static Test</b>	Less than 3 kv (AATCC-134)
<b>ADA Compliance</b>	Compliant For Accessible Routes
<b>Pill Test</b>	Yes
<b>Lightfastness</b>	Yes

Colorways

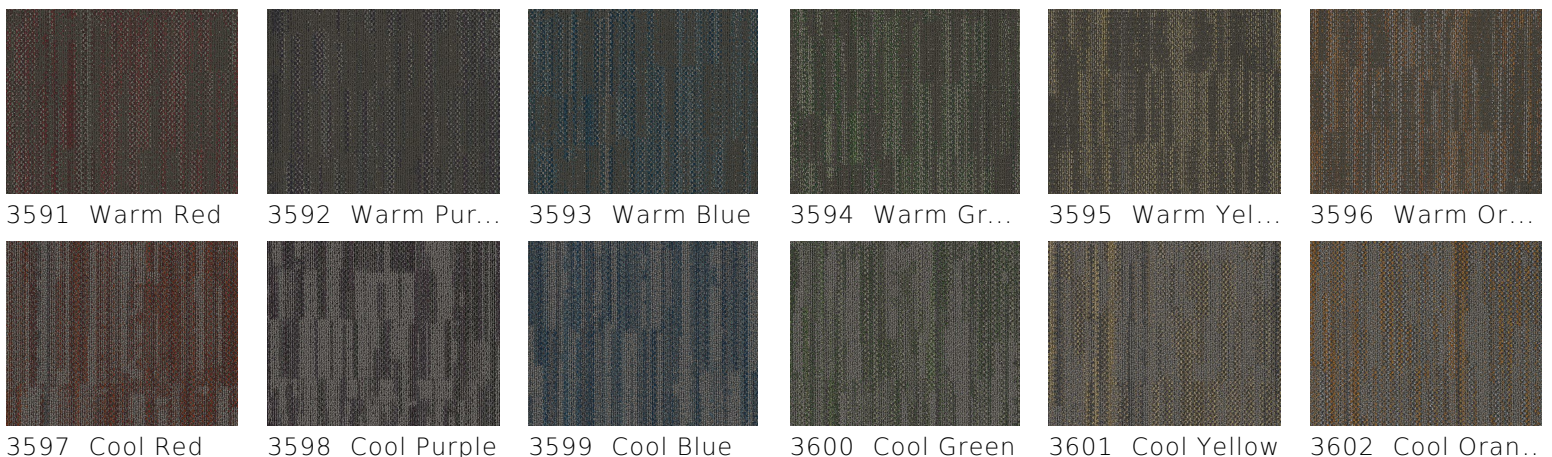

3591 Warm Red

3592 Warm Pur...

3593 Warm Blue

3594 Warm Gr...

3595 Warm Yel...

3596 Warm Or...

3597 Cool Red

3598 Cool Purple

3599 Cool Blue

3600 Cool Green

3601 Cool Yellow

3602 Cool Oran..